

## Power Supply / Controller Series


- MVL-PS2-24V10W-2CH
- MVL-PS2-24V10W-4CH

### Product Features

- Manual stepless intensity control
- External trigger. External trigger input (e.g. camera trigger signal for related light strobes and other sequences. (Strobe mode can greatly improve light source expectancy.)
- Convenient mounting with screws or on DIN rails



### Device Overview

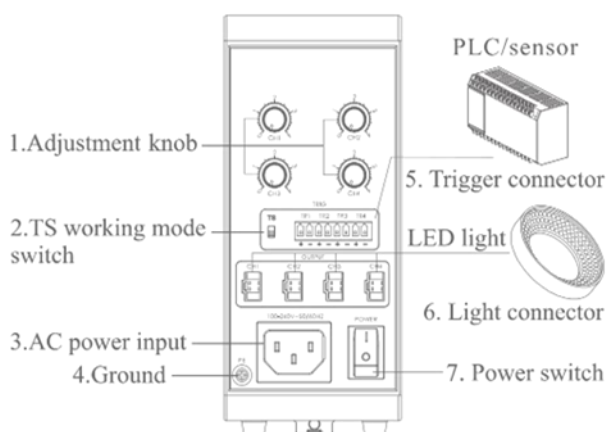


Remark: The image above is for AP1024F-4. The last number in Model AP1024F-1/2/3 indicates the number of adjustment knob, external trigger connector and light connector.

### Specifications

|                           |                                                 |
|---------------------------|-------------------------------------------------|
| <b>Model</b>              | MVL-PS2-24V10W-2CH<br>MVL-PS2-24V10W-4CH        |
| <b>Input voltage</b>      | 100 - 240V AC 50/60Hz                           |
| <b>Output voltage</b>     | 14.0 - 24.0V ( $\pm 0.2V$ ),<br>20W per channel |
| <b>Lighting mode</b>      | Continuous/strobe                               |
| <b>Intensity control</b>  | Stepless                                        |
| <b>Triggering</b>         | Switch                                          |
| <b>Response time</b>      | $\leq 80\mu s$                                  |
| <b>Response frequency</b> | $\leq 1KHz$                                     |
| <b>Channels</b>           | 2, 4                                            |

## Dimensions

### ■ MVL-PS2-24V10W-2CH

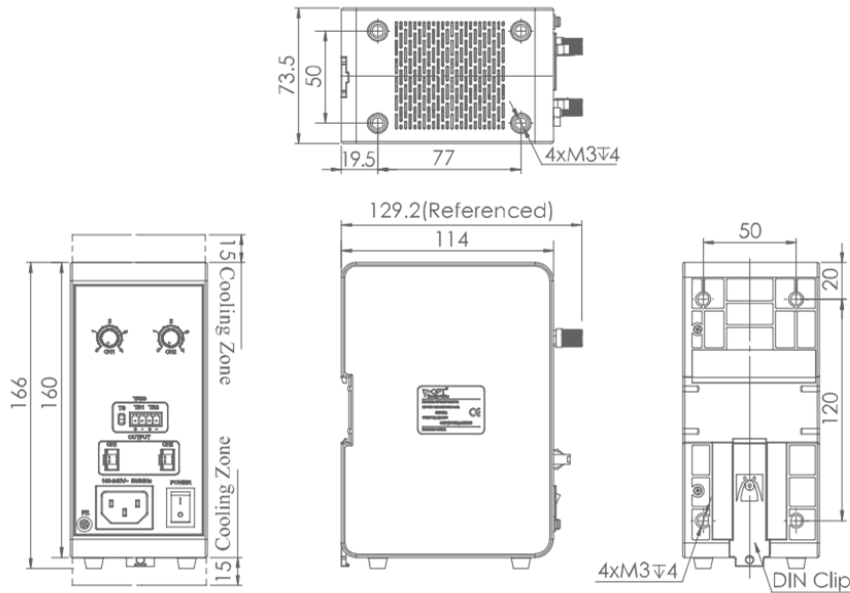

### ■ MVL-PS2-24V10W-4CH

