

Ring Lights Series

◆ MVL-RI7030W-24



Product Features :

- ◆ Providing extreme bright, uniform and diffuse illumination with different emitting angles
- ◆ Profile design with expanded heating dissipation area for improving performance.


Application Cases :

- ◆ PCB & plastic containers inspection
- ◆ Electronic components inspection; OCR for integrated circuits
- ◆ Microscope illumination; surface inspection


Specifications

Model	MVL-RI7030W-24
Color	White
Output	24V/4W
Angle	30
Channels	1
Housing Size (Length)	70
Recommended Controller	MVL-PS2-24V10W-2CH MVL-PS2-24V10W-4CH

Spectrum Chart

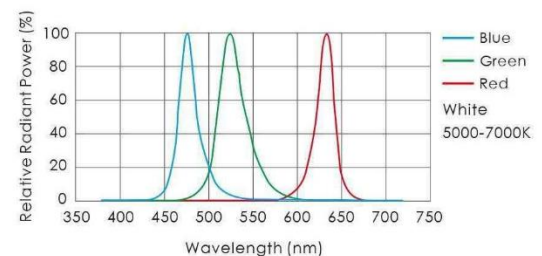

Customizable Items

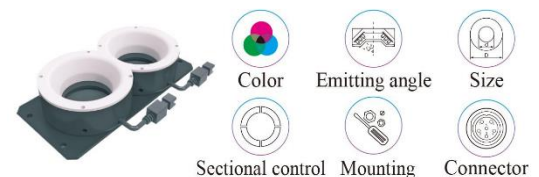

◆ Controller



Specifications

Model	MVL-PS2-24V10W-2CH MVL-PS2-24V10W-4CH
Input voltage	100 - 240V AC 50/60Hz
Output voltage	14.0 - 24.0V ($\pm 0.2V$), 20W per channel
Lighting mode	Continuous/strobe
Intensity control	Stepless
Triggering	Switch
Response time	$\leq 80\mu s$
Response frequency	$\leq 1KHz$
Channels	2,4

Dimensions(mm)

◆ MVL-R17030W-24

